

BELL Table Lamp WIFI Version



MODEL: KT-B01A

VERSION: V0

DATE: Jan. 15, 2019

COMPANY

SHENZHENSHI KAIXIN GUANGDIAN CO., LTD

SHENZHEN LINKLITE SMART LIGHTING CO., LTD



ADDRESS

RM# 909, Software Building, No. 9 Gaoxin Zhong Yi Road, High-Tech Park,
Nanshan district, Shenzhen, Guangdong, China, 518057

FEATURES

- I VOICE CONTROL: The table lamp works with smart home AI devices for voice control, like Amazon Alexa, Google Assistant, IFTTT.
- I LIMITLESS POSSIBILITY: Control through the smart life APP, customize your own personal light, capable of 16 million colors and color temperature of white light, quick scene setting. With the smart life APP you can control your lights remotely wherever you are.
- I COMFORTABLE WHITE LIGHT: 2000K candle color light design, provide a leisure lighting scene. 3 phases color temperature changing (2000K->3000K->4000K) by setting control panel.
- I RETRO KNOB DIMMING DESIGN: New stepless brightness dimming experience, color changing, setting the light you want through the Rotary Switch.
- I EYE HEALTHY CARE: Flicker free 3% and no glare.
- I MEMORY THE LAST MODE YOU SET: Memory so that it can remember the last mode (the last color or white light either power off or turn off the power button).
- I SET TIMER FOR YOUR CONVENIENCE: Set a timer or schedule to control automatically. The APP can make it seem like you are home when you are not, using the schedule function in APP. Set the lights to come on at a pre-set time, so the lights are on when you arrive home. Also you can short press the Timer button, the lamp will turn off automatically after 30 minutes.
- I SUITABLE FOR KIDS STYLE: light surface heat printing technology. Printed leaves, starry sky, animal world and other forms on the luminous surface, integrated with the style of children's room.


TECHNICAL DETAILS

Types	Items	Parameter
Electronics	Wattage	5W
	Adapter Input	100-240Vac 50/60Hz
	Adapter Output	5VDC/ 1A
	Current ripple	Flicker free 3%
Light Source	Luminous Flux/ Intensity	450LM@4000K, Red:7.2cd, Green:12cd, Blue: 6.6cd
	CCT	2000K-4000K
	Color Quantity	16 million colors
	CRI	Ra>80, Ra>90@2000K
Light Source	LED	2000K White LED:12PCS×0.3W 4000K White LED:12PCS×0.3W RGB LED: 12PCS×0.12W
Environmental requirement	IP Protection	IP20
	Operation Temperature	-20°C~40°C/-4°F~104°F

	Operation Humidity	5RH~90RH
	Storage Temperature	-30℃~80℃/-22°F~176°F
	Storage Humidity	5RH~95RH
Body	Base finish	Silver / Rose Gold
	Control panel finish	Grey/ White
	Weight	1.35lb/610g
Network	WIFI	IEEE802.11b/g/n(2.4GHz)
Lifetime		30,000hours

CERTIFICATION

Types	Standards	Coincidence Check	Status
FCC ID	FCC Part 15.247	Pass	Authorized
FCC SDOC	FCC Part15B	Pass	Authorized
CE LVD	EN 60950-1: 2006 + A11: 2009 + A1: 2010 + A12: 2011 + A2: 2013	Pass	/
CE RED	EN300328 /EN301489-1&-17	Pass	/

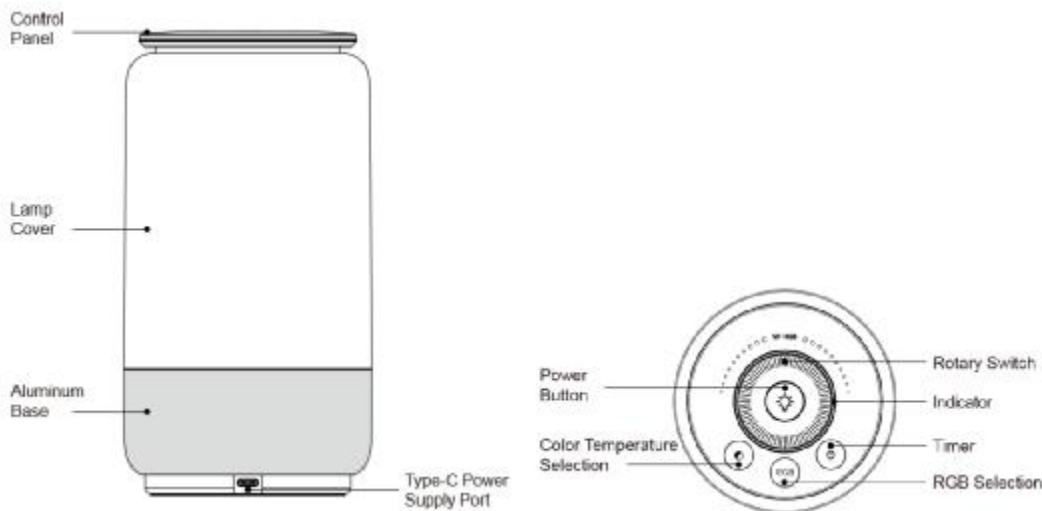

Control Panel Operation

- **ON/OFF** Place the lamp on a flat surface. Attach the power adapter to the Type-C port on the lamp and insert the power adapter into a 120VAC household outlet. Short press the Power Button to turn on and off the lamp.
- **Select Color Temperature and Adjust Brightness** Short press the Color Temperature Selection button repeatedly to cycle through 2000K->3000K->4000K. Through the Rotary

Switch to precisely adjust brightness.

- Select Color-changing Mode and Color Short press the RGB Selection button enter scene mode. Through the Rotary Switch to select the fixed color.
- Set the Timer Short press the Timer button, the lamp will turn off automatically after 30 minutes.

NOTE: Changing any setting (brightness, color temperature, color) while the lamp is on will reset the timer.

Installation Instruction

Smart lamps are designed to be easily used to control your home improvements and appliances in smart way just follow steps below:

Step One

1. Search the latest version of “Tuya Smart” App from Apple App Store or Google Play Store and also can scan the QR code.



2. Open the App and click register.
3. Select your country code, enter the cellphone number and get a message containing a verification code.
4. Enter code in the “Verification Code” field, set your password and tap “Login”.

NOTE: More information about App can be found on the website: <https://smartapp.tuya.com>

Step Two

1. Connect lamp to power supply and turn on the power.
2. Long press the timer button for more than 5 seconds until the green light flash, going into connecting status.

Step Three

1. Tap “+” or “Add device” button of the window. Select the lighting devices.
2. Make sure the lamp indicator quickly flashes and then tap “Confirm light blinks rapidly”. If the indicator is not flashing quickly, tap the “AP Mode” on the top right corner, and then tap “Confirm light slowly blink”.
3. Enter your home WIFI network password.
4. The progress bar shows your lamp is trying to connect, the “Add successfully” message appears once connected.

NOTE: Ensure that the user can control the device normally, if you have trouble or concerns with this step, please refer to the "help center" in the column “me”.

How to use smart home AI devices control smart lamps

1. Enter to the control interface after open the “Tuya Smart” App, then click on the upper right corner of the lamp control interface to enter the lamp details.


2. Rename your lamp to be recognized by third-party smart control devices.
3. Choose the logo which you have installed in the supported Third-party control bar and follow the instruction until install completed. The instruction includes video, operation steps and example.

Third-party platform compatibility



DIMENSIONS

BRAND

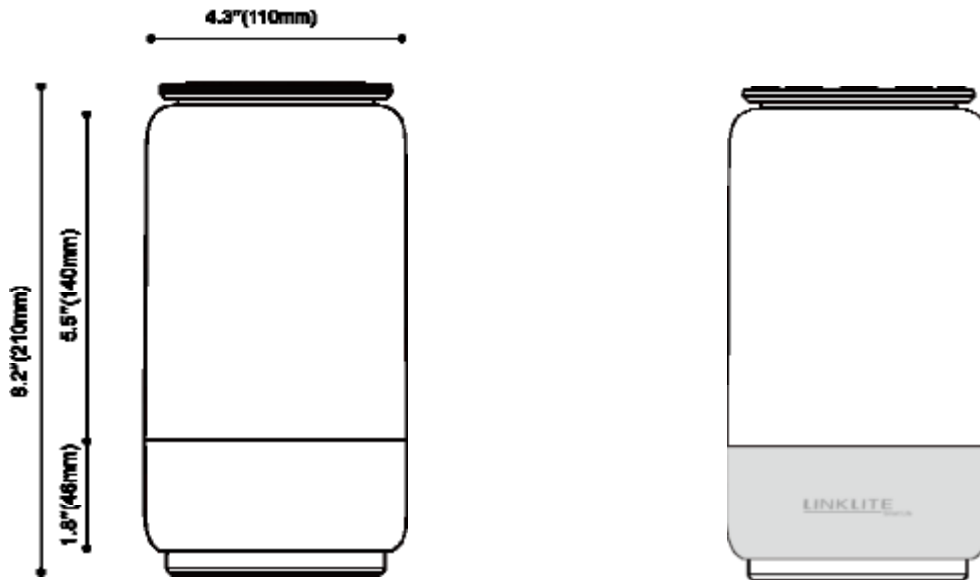

PACKAGE

Inner box size:	132*132*270mm
Outer carton size:	545*280*560mm
PCS per inner carton:	1
PCS per outer carton	16
N.W. per outer carton	11.8 kg
G.W. per outer carton	13.3 kg

LIMITED WARRANT

2 years limited warranty from original purchase date. To learn more about the Limited Warranty for Linklite products, please visit www.hensel-hk.com.